
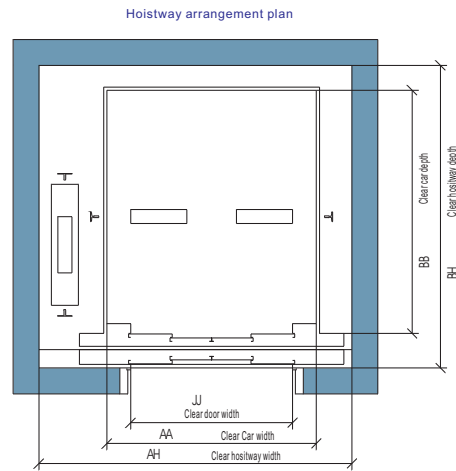
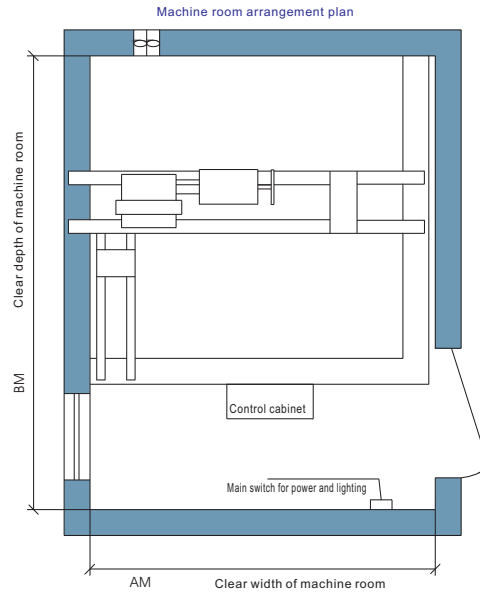


GOODS 1

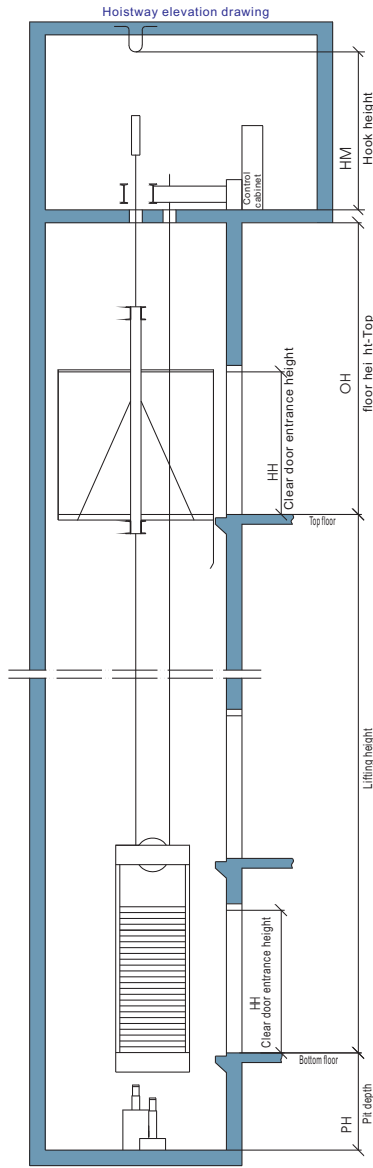

Main technical parameters (geared)

rated capacity (Kg)	rated speed s/m()	car size		door size		hoistway dimensions				machine room dimensions		
		mm(AA)	mm(BB)	mm(JJ)	mm(HH)	mm(AH)	mm(BH)	mm(PH)	mm(OH)	mm(AM)	mm(BM)	mm(HM)
630	0.5	1340	1250	1200	2200	2250	1800	≥ 1400	≥ 4500	3000	3200	≥ 2500
	1.0											
1000	0.5	1340	1850	1200	2200	2250	2400	≥ 1400	≥ 4500	3000	3800	≥ 2500
	1.0											
1600	0.5	1640	2250	1500	2200	2800	2800	≥ 1400	≥ 4500	3200	4200	≥ 2500
	1.0											
2000	0.5	1940	2250	1500	2200	2900	2800	≥ 1400	≥ 4500	3200	4200	≥ 2500
	1.0											
3000	0.25	2440	2350	1800	2400	3600	2900	≥ 1700	≥ 4900	4000	4500	≥ 2500
	0.5											
4000	0.25	2440	3150	2200	2400	3800	3700	≥ 1700	≥ 4900	4500	4500	≥ 2500
	0.5											
5000	0.25	2440	3850	2200	2400	3800	4400	≥ 1700	≥ 4900	4500	5000	≥ 2500
	0.5											