



- Safety features you can trust
- Low noise, Low vibration
- New decoration, attractive, and decent
- Energy saving design
- Simple operation
- Convenient for wheel chair entry
- No missed call of the phone
- Economical and installation in any structures



Elegant reinforced aluminum alloy shaft


To overcome all the difficulties when installing your home lift




Layout Drawing

Single entrance (steel structure, RC structure)

Double entrance (steel structure, RC structure)

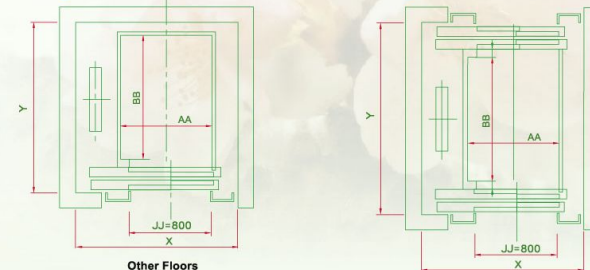

Other Floors



Top Floor

| HRC | Single entrance (XxY) | Double entrance (XxY) | (AAxBBxHC) |
|-----------|-----------------------|-----------------------|------------------|
| 2 Persons | 1550x1250 | 1550x1450 | 900Wx900Dx2100H |
| 3 Persons | 1550x1550 | 1550x1750 | 900Wx1200Dx2100H |
| 4 Persons | | | |
| 5 Persons | 1650x1550 | 1650x1750 | |
| 6 Persons | | | |

Basic specification:

| Purpose | | Resident use | | | | |
|--------------------------|-----------|--|-------------------|-------------------|-------------------|-------------------|
| Driving type | | Wire rope | | | | |
| Rated load | | 2 persons (140kg) | 3 persons (200kg) | 4 persons (320kg) | 5 persons (400kg) | 6 persons (450kg) |
| Power | Motor | Single phase 220V · Triple phase 220V/380V | | | | |
| | Light/Fan | 110V /220V ; 50Hz/60Hz | | | | |
| Motor | | 1.5kw | 1.5kw | 2.2(3.0)kw | 2.2(3.7)kw | 3.7kw |
| Maximum stop | | 6 stops | | | | |
| Maximum travel(R) | | 20 meters | | | | |
| Rated speed | | 20m/min | | 30(45)m/min | | |
| Door opening | | 2 panels side opening | | | | |
| Cabin side (mm) AAxBBxHC | | 900x900x2100 | 900x1200x2100 | | | |
| Entrance size (mm) | | 800x2000 | | | | |
| OH | | 2900 | 3100 | 3400 | | |
| Pit | | 500 | 700 | 1000 | | |
| Remark | | For self-operation wheelchair | | | | |

• We have plenty of designs. Please consult our sales department for more information.